


h = Separator connection height from ground (mm)
 h = _____ mm (Max. 2500 mm)

This drawing and the technical information included in the drawing are property of Wavin-Labko. All the national regulations concerning this product have to be checked before purchase of the product. Installation have to be done according to installation manual.

Approved by customer:

_____ / _____ 200_____

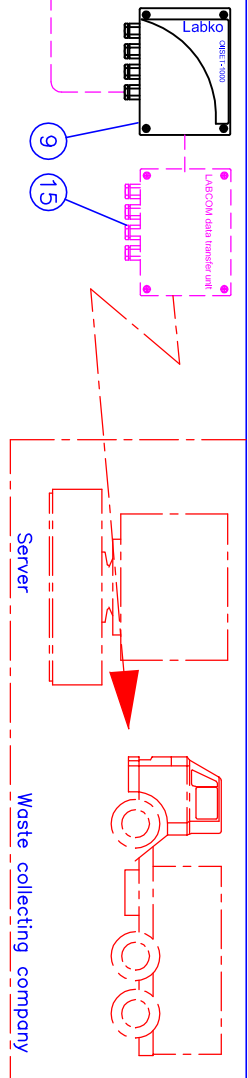

Max. Flow: 125 l/s
 Weight: 3600 kg (without maintenance shaft)

15	ACCESSORY: Labcom Data Transfer Unit. (x) <input type="checkbox"/>			
14	ACCESSORY: Floating adjustable cover ø600 (2 pcs.), Standard EN124			
	Cover class A15 (1.5 tn) (x) <input type="checkbox"/>			
	Cover class G250 (25 tn) <input type="checkbox"/>			
	Cover class D400 (40 tn) <input type="checkbox"/>			
	Frame <input type="checkbox"/>			
13	ACCESSORY: Floating adjustable cover ø800 (1 pc.), Standard EN124			
	Cover class D400 (40 tn) (x) <input type="checkbox"/>			
12	Oil storage volume	2 200 l		
11	Effective volume	52 500 l		
10	Ventilation outlet	PE-MD D110		3
9	OilSET-1000 oil alarm unit with SET DM/3 probe			1
8	EuroHUK 600 maintenance shaft (as needed), PE-MD plastic (2 pcs.)			
	h = Separator connection height from ground (Max. 2500 mm)			
	EuroHUK 600 h 9-13 (x) <input type="checkbox"/>	PE-MD	h = 900...1300 mm	(22 kg)
	EuroHUK 600 h13-17 <input type="checkbox"/>	PE-MD	h = 1300...1700 mm	(38 kg)
	EuroHUK 600 h17-21 <input type="checkbox"/>	PE-MD	h = 1700...2100 mm	(56 kg)
	EuroHUK 600 h21-25 <input type="checkbox"/>	PE-MD	h = 2100...2500 mm	(80 kg)
7	EuroHUK 800 maintenance shaft (as needed), PE-MD plastic (1 pc.)			
	h = Separator connection height from ground (Max. 2500 mm)			
	EuroHUK 800 h 9-13 (x) <input type="checkbox"/>	PE-MD	h = 900...1300 mm	(25 kg)
	EuroHUK 800 h13-17 <input type="checkbox"/>	PE-MD	h = 1300...1700 mm	(42 kg)
	EuroHUK 800 h17-21 <input type="checkbox"/>	PE-MD	h = 1700...2100 mm	(60 kg)
	EuroHUK 800 h21-25 <input type="checkbox"/>	PE-MD	h = 2100...2500 mm	(84 kg)
6	Cooleracer	pp		18
5	Maintenance shaft installation sleeve	GRP	D1000/1100 mm	3
4	Oil suction pipe	PVC	D160	2
3	Outlet sewer	PVC	D400	1
2	Inlet sewer	PVC	D400	1
1	Material: Glass Reinforced Plastic "Lasa Composit", ø3000, L=8800 mm pH 3-10/Heat resistance 50°C			1

Product: _____ Title: _____

Design by: EuroPEK NS125 Oil separator, Class I (EN858)

TP/JS _____ Checked by: _____ Approved by: _____

TP/JS _____ JP 02.02.09

Drawing no. 24QB06be

Construction site: _____

Drawing type: CUSTOMER DRAWING

Date: 02.02.09

Scale: _____

2.2.2009 9:42:46

WAVIN

Labkote 1
 FIN-36240 KANGASALA
 FINLAND
 Tel. +358-(0)20-1285 200
 Fax +358-(0)20-1285 280
 www.wavin-labko.fi

Labko

