


This drawing and the technical information included in the drawing are property of Wavin-Labko Ltd. Authorities' regulations must be known before providing the product. Products must be installed according to installation instructions.

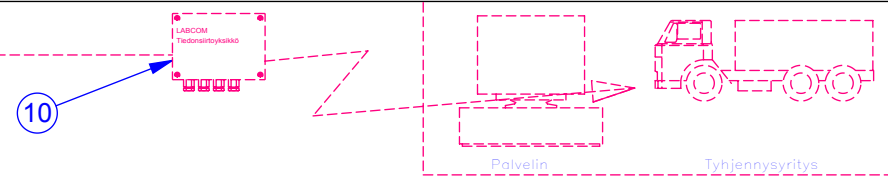

CE
09
EN 858-1

Fulfilled requirements of flow rate test according to standard EN858 (LGA)

Safety in case of fire: E
VTT test report VTT-S-7683-06

h = Connection height from ground surface
h = _____ mm (900...2500 mm)

B	Effective volume		600 l	
A	Oil storage volume (height 150 mm)		150 l	
10	ACCESSORY: Labcom -data transfer unit (x)	<input type="checkbox"/>		
9	OiISET-1000 oil alarm unit			1
9a	SET/DM3 -probe			1
8	ACCESSORY: Floating adjustable cover Ø600, Standard EN124			
	Cover class A15 1.5 tn (x)	<input type="checkbox"/>	Part no. 3322 050	
	Cover class C250 25 tn	<input type="checkbox"/>	Part no. 3322 054	
	Cover class D400 40 tn	<input type="checkbox"/>	Part no. 3322 056	
	Frame	<input type="checkbox"/>	Part no. 3325 010	
7	EuroHUK 600 maintenance shaft (as needed), PE-MD h = connection height from ground surface (mm)			1
	EuroHUK 600 h= 9-13 (x)	<input type="checkbox"/>	h= 900... 1300 mm	
	EuroHUK 600 h= 13-17	<input type="checkbox"/>	h= 1300... 1700 mm	
	EuroHUK 600 h= 17-21	<input type="checkbox"/>	h= 1700... 2100 mm	
	EuroHUK 600 h= 21-25	<input type="checkbox"/>	h= 2100... 2500 mm	
6	Ventilation outlet (as needed)	PE	D110	1
5	Coalescer			2
4	Fuel suction pipe	PVC	D160	1
3	Outlet sewer	PE-HD	D110	1
2	Inlet sewer	PE-HD	D110	1
1	Tank (pH3-10/Heat resistance max. 50°C)	PE-MD	1300x 1200 mm	1

Product: **EuroPEK Roo NS3 oil separator (I-class)** Drawing type: **CUSTOMER DRAWING**

Design by: TP/TL Approved by: HT 20.04.2010 Drawing no: 29AB08_e Date: 20.04.2010 Scale (A4): 1:30

Wavin Labko WAVIN-LABKO Ltd. Labkotie 1 FIN-36240 KANGASALA FINLAND puh. +358 020 1285 200 fax. +358 0201285 280 Construction site: