


Indoor installation (On the floor)

- C Grease storage capacity 160 l
- B Effective capacity 1150 l
- A Sludge capacity 480 l

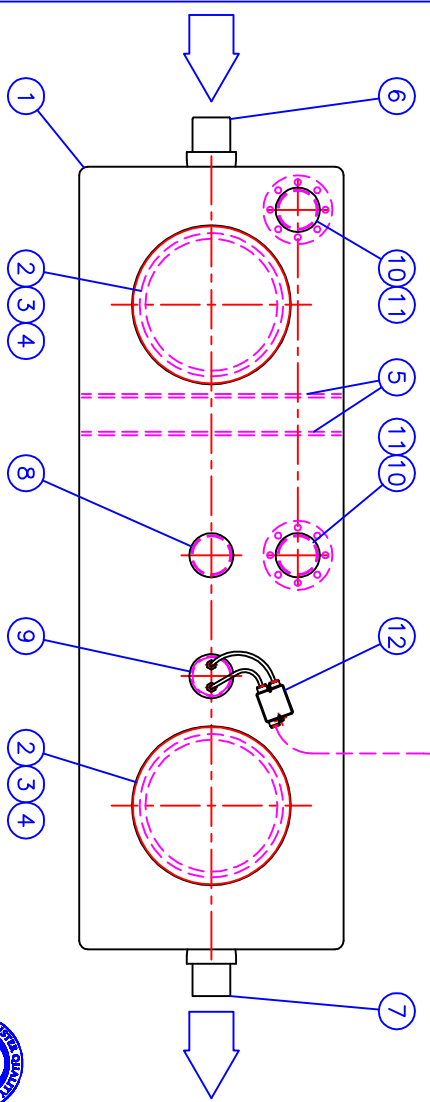

13	ACCESSORY: LABCOM Data Transfer Unit (x) <input type="checkbox"/>	1
12	SET-2000 Grease alarm unit with SET DM/3 and SET/OS2 probes (Indoor installation model)	1
11	ACCESSORY: Emptying pipe with flange, PVC, DN80, 1 pc (x) <input type="checkbox"/>	2
10	Inlet for Emptying pipe	1
9	Inlet for probes	1
8	Ventilation outlet	1
7	Outlet sewer	1
6	Inlet sewer	1
5	Wall	2
4	Cover	2
3	Gasket	2
2	Frame	2
1	Material: Glass Reinforced Plastic pH 3-10/Heat resistance 80°C	1

This drawing and the technical information included in the drawing are property of Wavin-Labko. All the national regulations concerning this product have to be checked before purchase of the product. Installation have to be done according to installation manual.

Approved by customer: _____ / _____ 200 .

WAVIN
Labko

WAVIN-LABKO
Labkote 1
FIN-36240 KANGASALA
FINLAND
Tel. +358-020-1285 200
Fax +358-020-1285 280

Product: EuroREK SLIM NS4 Grease separator

Title: CUSTOMER DRAWING

Design by: TS/JS/TL
Checked by: TdP
Approved by: 18.9.07

Drawing no. 32ZB01be
Date: 18.09.07
Scale:

Construction site: